


Product Management Team

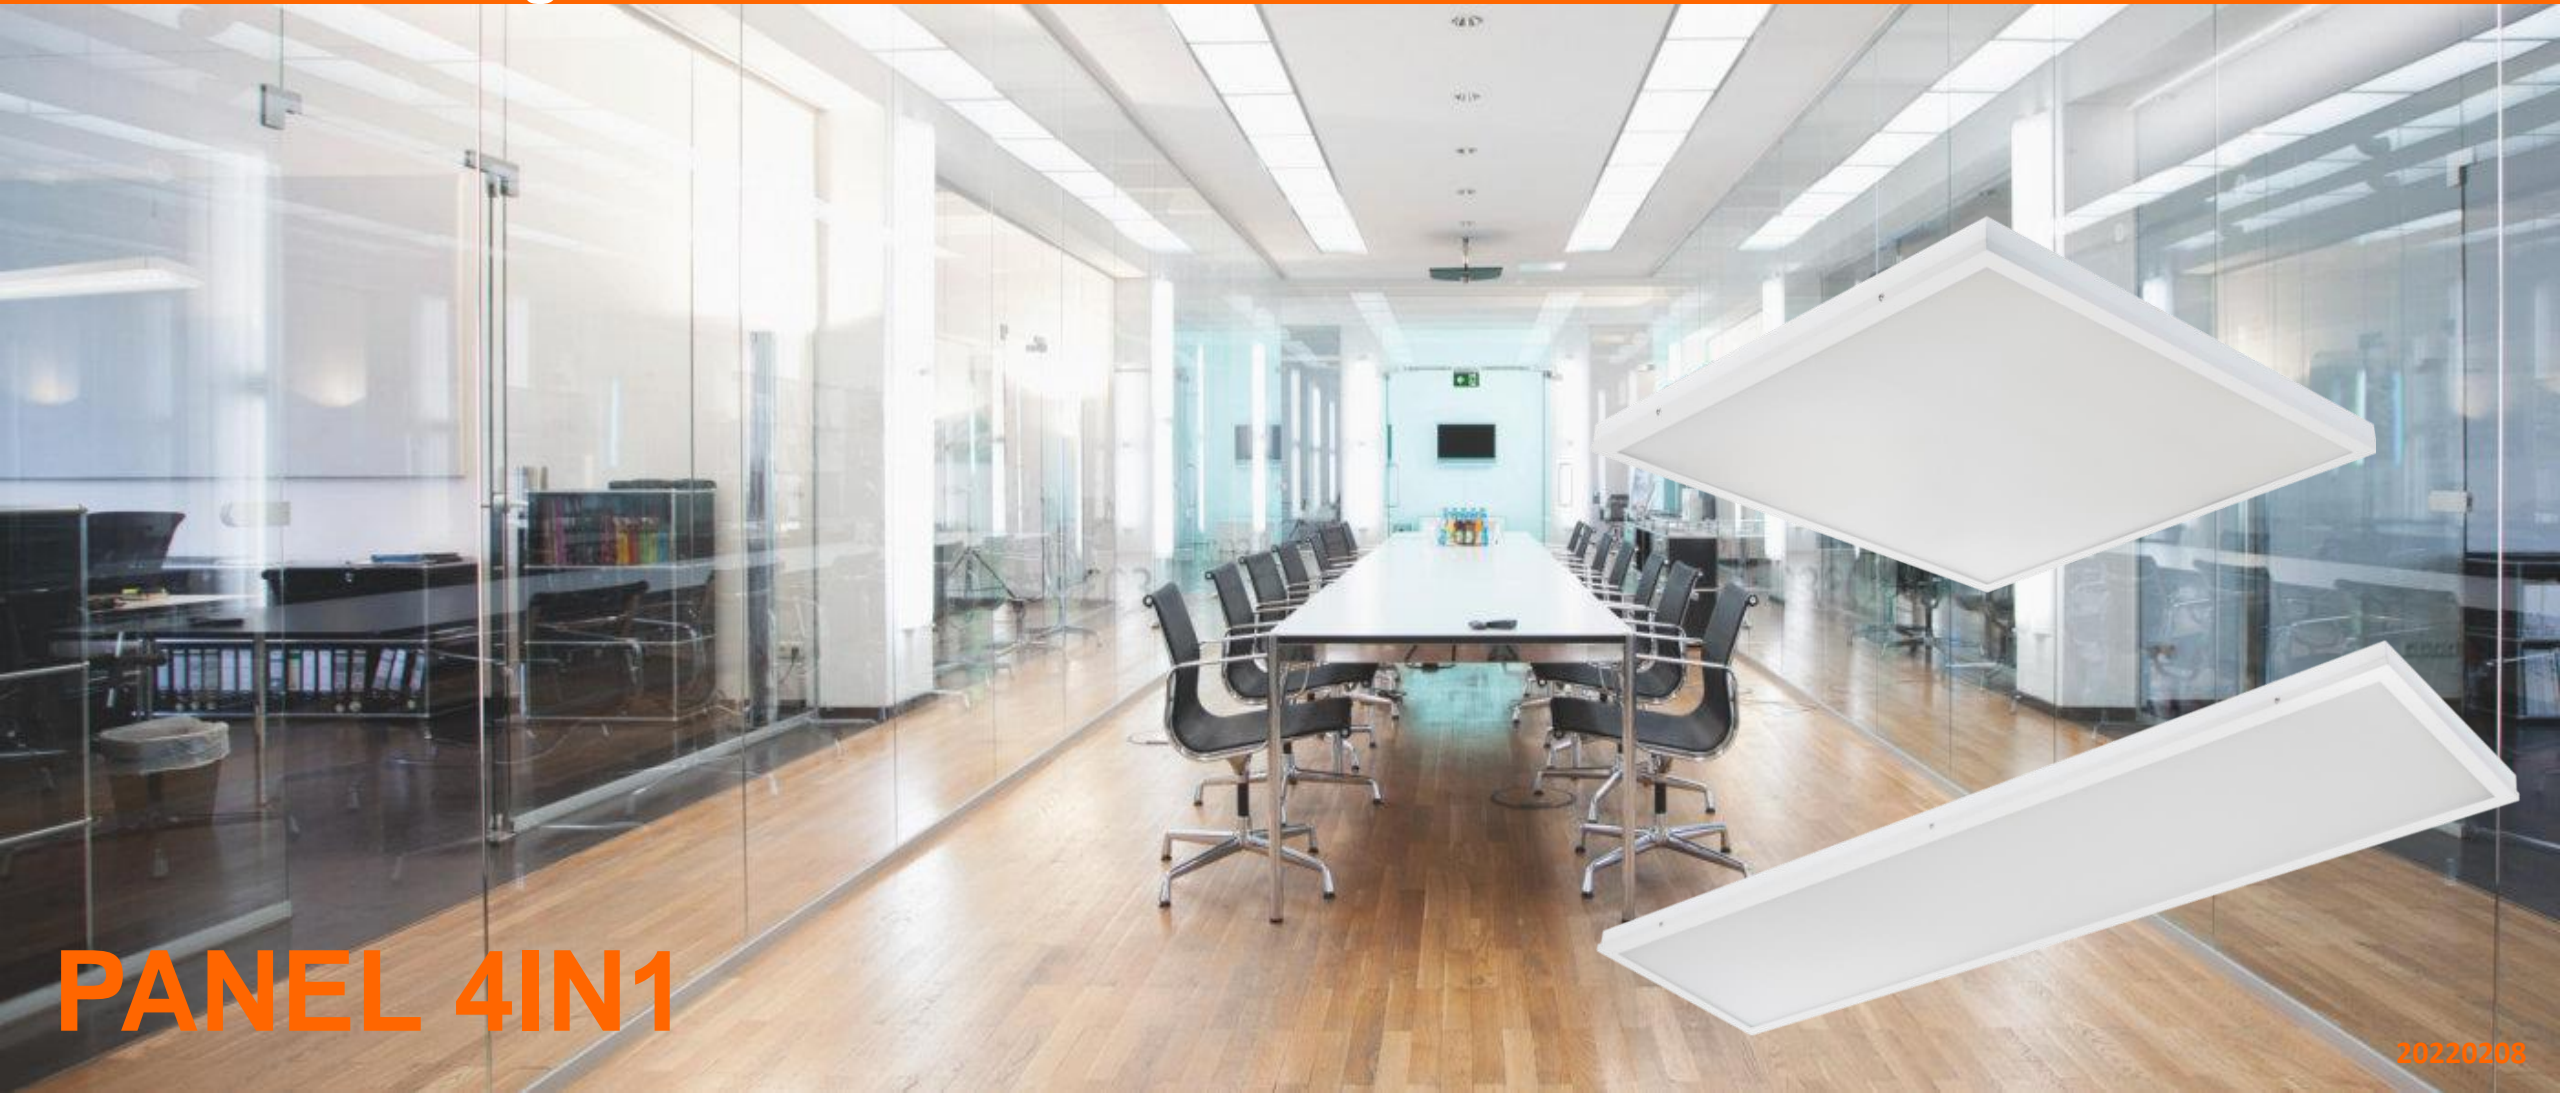

PANEL 4IN1

Family overview

PANEL 4IN1 600 / 1200




+ Portfolio




- 32W
- 3600 lm
- 600 X 600
- 300 X 1200
- 3000K
- 4000K
- 6500K
- UGR <22
- UGR <19



+ USP

- 50000 L70
- 44000 L80
- 112 lm/W
- 

COMPATIBLE with

-  CLIPS
-  Suspension kit
-  Recessed frame

Family overview

PANEL 4IN1

600 / 1200

ECO
CLASS



Product Features:

- Efficacy: 112 lm/W
- Luminous flux: 3600lm
- Light colors: 3000K/4000K/6500K
- Grid size: 600x600 and 300x1200
- Antiglare luminaire (UGR<22 and UGR<19)
- Lifespan: up to 50,000h (L70/B10 @ 25°C)
44,000h (L80/B10 @ 25°C)
- IP20
- Warranty: 5 years¹

Suitable accessories:

- Recessed Mount Clips
- Recessed Mount Frame
- Suspension Kit

¹Refer to www.ledvance.com/guarantee for precise conditions

Areas of Application





- Corridors,
- Industrial kitchens
- Elevators
- Hospitals
- Reception Areas,
- Foyers



Surface installation

PANEL 4IN1
600 / 1200



SURFACE

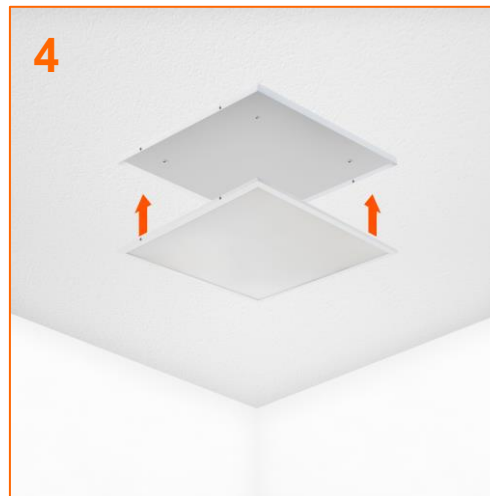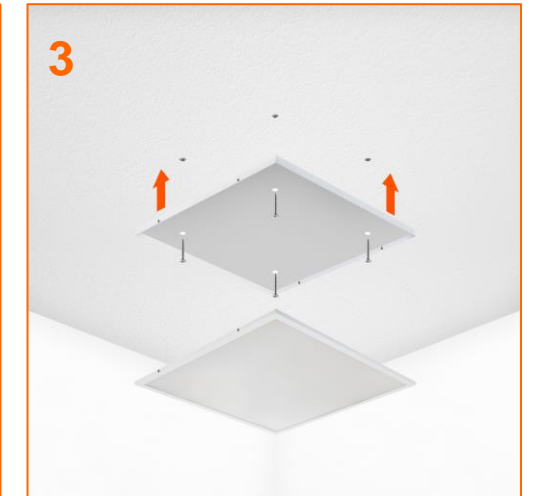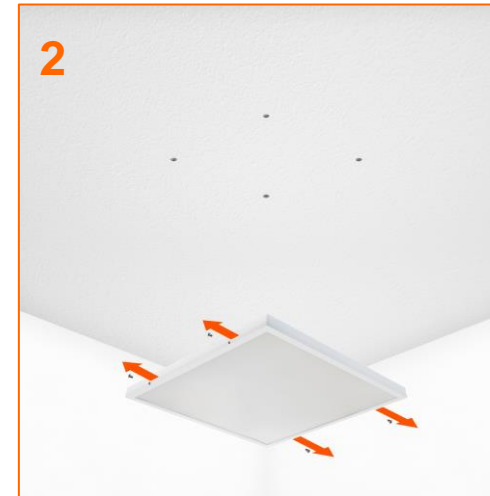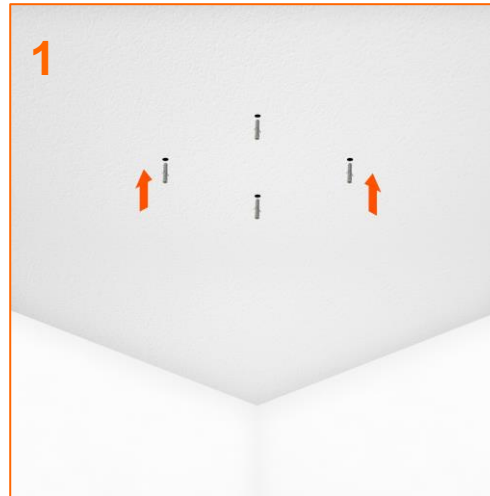


Alternative ways of installation

PANEL 4IN1
600 / 1200

CLIPS

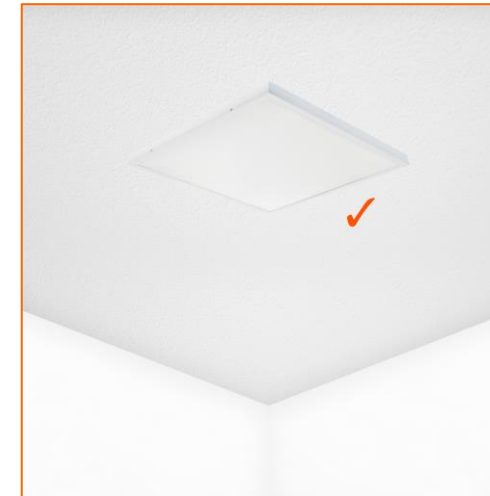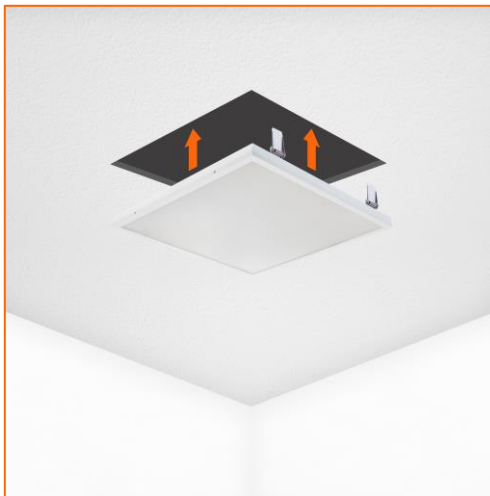


**Recessed
frame**

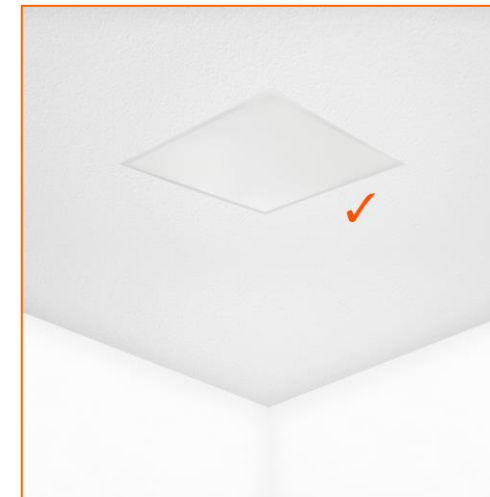


Alternative ways of installation

PANEL 4IN1
600 / 1200

**Suspension
kit**

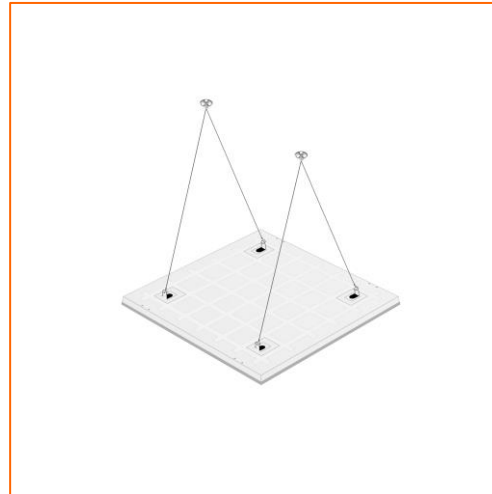

Recessed

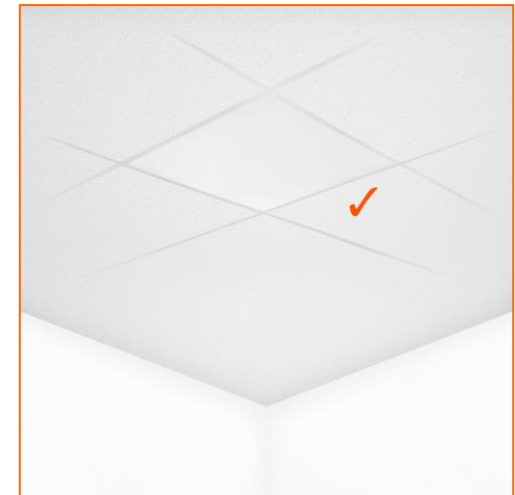

Specification

PANEL 4IN1 600 / 1200 UGR22

Short text	EAN10	EAN40	Power	Luminous flux	Luminous efficacy	CCT	CRI	UGR	Lifetime	Protection class	Ingress protection	Operating temp.	Guarantee	Dimensions
			[W]	[lm]	[lm/W]	[K]			L70 [h]			[°C]	[years]	[mm]
PANEL 4IN1 600 32W 830 WT	4058075699540	4058075699557	32	3600	112	3000	>80	<22	50.000	I	IP20	-10° .. +50°	5	595x595x34
PANEL 4IN1 600 32W 840 WT	4058075699564	4058075699571	32	3600	112	4000	>80	<22	50.000	I	IP20	-10° .. +50°	5	595x595x34
PANEL 4IN1 600 32W 865 WT	4058075699588	4058075699595	32	3600	112	6500	>80	<22	50.000	I	IP20	-10° .. +50°	5	595x295x34
PANEL 4IN1 1200 32W 830 WT	4058075699663	4058075699670	32	3600	112	3000	>80	<22	50.000	I	IP20	-10° .. +50°	5	1195x295x34
PANEL 4IN1 1200 32W 840 WT	4058075699687	4058075699694	32	3600	112	4000	>80	<22	50.000	I	IP20	-10° .. +50°	5	1195x295x34
PANEL 4IN1 1200 32W 865 WT	4058075699700	4058075699717	32	3600	112	6500	>80	<22	50.000	I	IP20	-10° .. +50°	5	1195x295x34



Specification

PANEL 4IN1 600 / 1200 UGR22

Short text	EAN10	EAN40	Power	Luminous flux	Luminous efficacy	CCT	CRI	UGR	Lifetime	Protection class	Ingress protection	Operating temp.	Guarantee	Dimensions
			[W]	[lm]	[lm/W]	[K]			L70 [h]			[°C]	[years]	[mm]
PANEL 4IN1 600 32W 830 UGR19 WT	4058075699601	4058075699618	32	3600	112	3000	>80	<19	50.000	I	IP20	-10° .. +50°	5	595x595x34
PANEL 4IN1 600 32W 840 UGR19 WT	4058075699625	4058075699632	32	3600	112	4000	>80	<19	50.000	I	IP20	-10° .. +50°	5	595x595x34
PANEL 4IN1 600 32W 865 UGR19 WT	4058075699649	4058075699656	32	3600	112	6500	>80	<19	50.000	I	IP20	-10° .. +50°	5	595x295x34
PANEL 4IN1 1200 32W 830 UGR19 WT	4058075699724	4058075699731	32	3600	112	3000	>80	<19	50.000	I	IP20	-10° .. +50°	5	1195x295x34
PANEL 4IN1 1200 32W 840 UGR19 WT	4058075699748	4058075699755	32	3600	112	4000	>80	<19	50.000	I	IP20	-10° .. +50°	5	1195x295x34
PANEL 4IN1 1200 32W 865 UGR19 WT	4058075699762	4058075699779	32	3600	112	6500	>80	<19	50.000	I	IP20	-10° .. +50°	5	1195x295x34

